
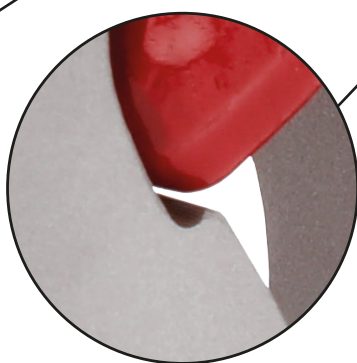
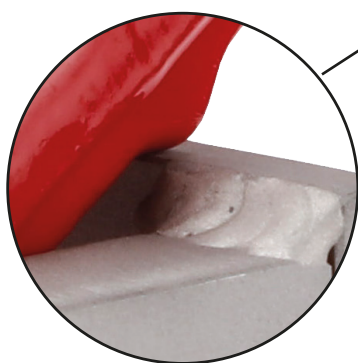


ZURRPUNKT ZK-MODUL

TWN 1471

- Güteklasse 8
- In 5.000 daN und 10.000 daN verfügbar
- 100% Zurrkraft (LC) in alle Richtungen
- Einfache und sichere Montage an Seitenrahmen
- Stabiler Zurrpunkt (lange Lebensdauer)
- Schwenkbereich von 150° bis 30°
- Erfüllt Anforderungen der EN 12 640
- Versenkbar (Unfallvermeidung)
- Schweißanleitung im Lieferumfang enthalten
- 100% rissgeprüft
- TÜV-Zulassung
- Nahezu für alle Fahrzeugrahmen geeignet (Anpassung auf Anfrage)
- Optional besonderer Kassettenwerkstoff für feuerverzinkte Ausführung möglich

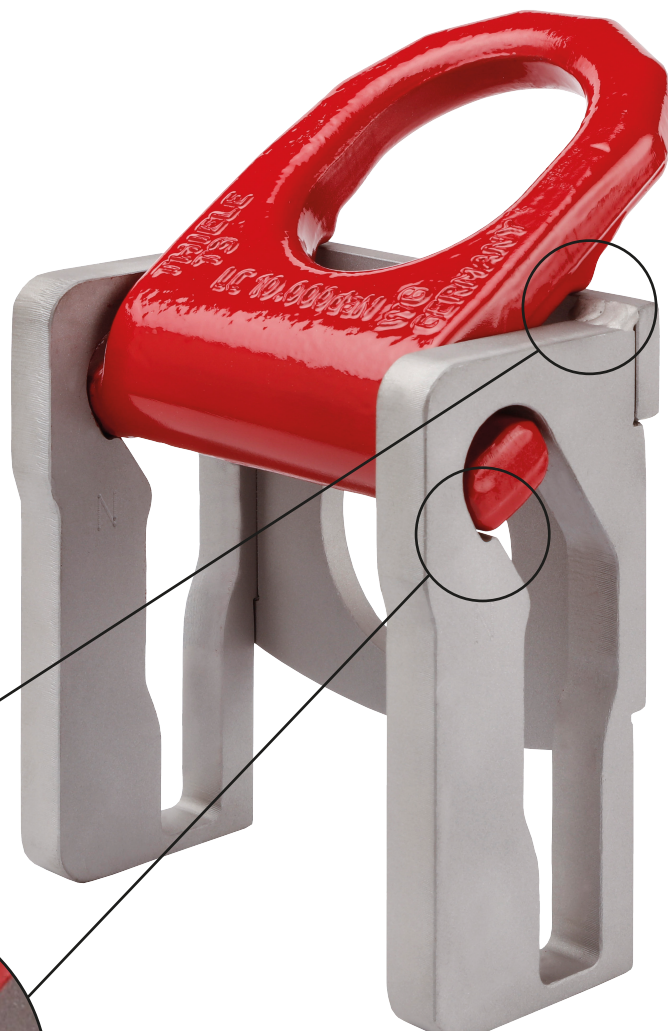


NEU: STRESSLESS LASHING®

Jetzt auch mit mechanischer Positionierungsnase

Erst die Ringöse entlang der Auflageplattform in ausgefahrenem Zustand in Parkposition bringen.
Dann stressfrei verzurren.








LASHING POINT ZK-MODUL

TWN 1471

- Grade 80
- Available in 5.000 daN and 10.000 daN
- 100% Lashing Capacity (LC) to all directions
- Easy and safe mounting at the side frames
- Stable Lashing Point (long service life)
- Swivel range from 150° – 30°
- Complies with EN 12640
- Retractable (accident prevention)
- Welding instruction included in the scope of supply
- 100% crack tested
- TÜV approval
- Suitable for almost every vehicle frame (adjustment on request)
- Optional the cassette is available with special steel for hot dip galvanized execution

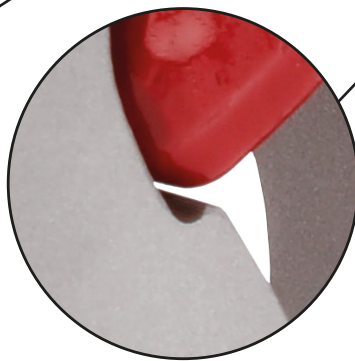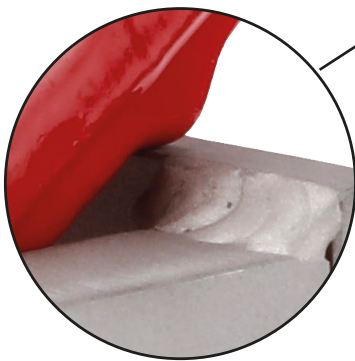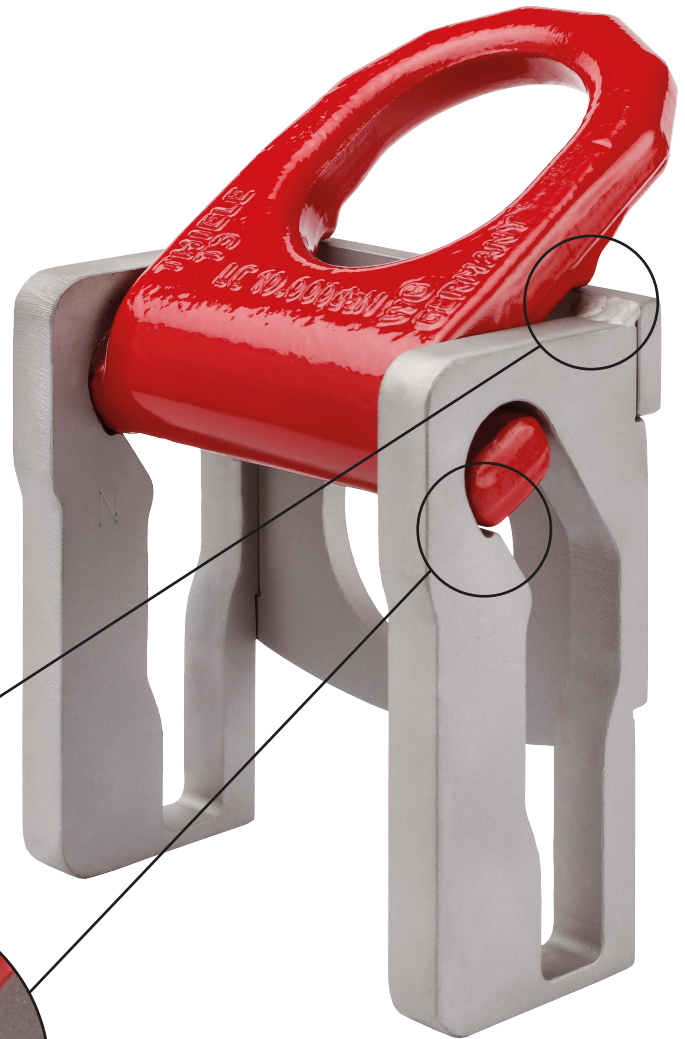

NEW: STRESSLESS LASHING®

Now available with
mechanical positioning nose

First bring the ring eyelet
along the platform in extended
parking position.
Then lash stressless.

